



AMMETER TRANSFER SWITCHES

3-PHASE, 2 CURRENT TRANSFORMERS - 3107C

Handle: Round Knurled
 Jumpers supplied as shown
 Engraving Code: 031C-3A10A

DECKS	CONTACTS	POSITIONS		
		1 *	2 *	3
1	11			
	13	X	X	X
2	21			
	23	X	X	X

* Denotes make-before-break





3-PHASE, 2 CURRENT TRANSFORMERS - 3108C

Handle: Round Knurled
 Jumpers supplied as shown
 Engraving Code: 031C-4A13

DECKS	CONTACTS	POSITIONS			
		OFF	1 *	2 *	3
1	11				
	13		X	X	X
2	21				
	23		X	X	X

* Denotes make-before-break





3-PHASE, 3 CURRENT TRANSFORMERS - 3109C

Handle: Round Knurled
 Jumpers supplied as shown
 Engraving Code: 031C-3A10A

DECKS	CONTACTS	POSITIONS		
		1 *	2 *	3
1	11			
	12	X	X	X
	13	X	X	X
2	21			
	22	X	X	X
	23	X	X	X

* Denotes make-before-break



3-PHASE, 3 CURRENT TRANSFORMERS - 3110C



Handle: Round Knurled

Jumpers supplied as shown

Engraving Code: 031C-4A13

DECKS	CONTACTS	POSITIONS			
		OFF	1*	2*	3
1	11				
	12	X			
	13		X		
	14			X	
2	21				
	22	X			
	23		X		
	24			X	

* Denotes make-before-break



3-PHASE, 3 CURRENT TRANSFORMERS - 3111C or 3112C

THREE INDEPENDENT CIRCUITS


Handle: Round Knurled

Jumpers supplied as shown


Engraving Code: 031C-3A10 (for 3111C); 031C-5A16 (for 3112C)

DECKS	CONTACTS	POSITIONS		
		1*	2*	3
1	11			
	13	X		
	14		X	
	15			X
	16	X		
2	21			
	23	X		
	24		X	
	25			X
	26	X		
3	31			
	33	X		
	34		X	
	35			X
	36	X		
4	41			
	43	X		
	44		X	
	45			X
	46	X		
5	51			
	53	X		
	54		X	
	55			X
	56	X		
6	61			
	63	X		
	64		X	
	65			X
	66	X		

* Denotes make-before-break

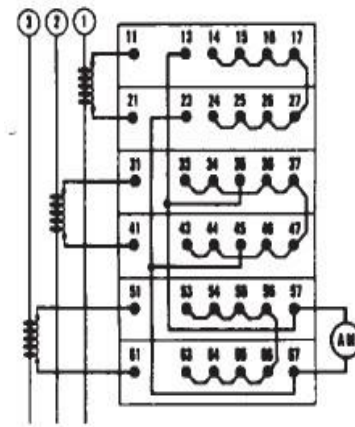

3111C Engraving:



3112C Engraving:

