

CIRCUIT BREAKER CONTROL - 2441D

Operate two Breakers



Handle: Pistol Grip

Spring Return

Jumpers as Shown

Engraving Code: 018B-2B23

DECK	CONTACTS	POS.		
		TRIP	NORMAL	CLOSE
1	11-12 15-16	X		
	13 17			X



Note: Contacts 11-12 & 15-16 connected internally in normal position

CIRCUIT BREAKER CONTROL - 2442D



Handle: Pistol Grip

Spring Return

Jumpers as Shown

Engraving Code: 018B-2B23

DECKS	CONTACTS	POS.			
		TRIP	TRIP	TRIP	CLOSE
1	11-12 15-16	X	X	X	
	14 17				X
2	22-23 26-27				X

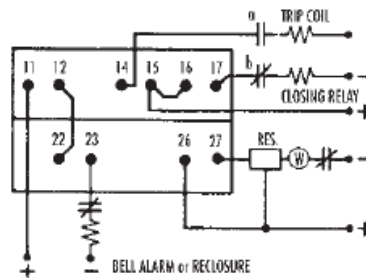

Note: Contacts 11-12 & 15-16 connected internally in normal position

CIRCUIT BREAKER CONTROL - 2443D



Handle: Pistol Grip

Spring Return

Jumpers as shown

Engraving Code: 018B-2B23

DECKS	CONTACTS	POS.			
		TRIP	TRIP	TRIP	CLOSE
1	12-13 15-16	X			
	14 17				X
2	21-22				X
	32-33 36-37				X

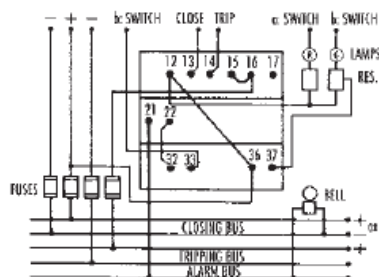

Note: Contacts 11-12 & 15-16 connected internally in normal position


CIRCUIT BREAKER CONTROL - 2444D

Handle: Pistol Grip

Spring Return

Engraving Code: 018B-2B23

DECKS	CONTACTS	POS.			
		TRIP	WAT	MAC	CLOSE
1	11 ○— — —○18	✗			
	16 ○— — —○17				✗
2	21 ○— — —○22		✗	✗	
	25 ○— — —○26		✗	✗	
3	32 ○— — —○33			✗	✗
	36 ○— — —○37			✗	✗




CIRCUIT BREAKER CONTROL - 2445D

Handle: Pistol Grip

Spring Return

Engraving Code: 018B-2B23

DECKS	CONTACTS	POS.			
		TRIP	WAT	MAC	CLOSE
1	11 ○— — —○18	✗			
	16 ○— — —○17				✗
2	21 ○— — —○22		✗	✗	
3	32 ○— — —○33			✗	✗
	36 ○— — —○37			✗	✗
4	41 ○— — —○42	✗	✗		
	45 ○— — —○46	✗	✗		




CIRCUIT BREAKER CONTROL - 2446D

Handle: Pistol Grip

Spring Return

Engraving Code: 018B-2B23

DECKS	CONTACTS	POS.			
		TRIP	WAT	MAC	CLOSE
1	11 ○— — —○18	✗			
	14 ○— — —○15	✗			
2	21 ○— — —○22		✗	✗	
	26 ○— — —○27		✗	✗	
3	32 ○— — —○33			✗	✗
	36 ○— — —○37			✗	✗
4	42 ○— — —○43			✗	✗
	46 ○— — —○47			✗	✗



CIRCUIT BREAKER CONTROL - 2450D


Handle: Pistol Grip

Spring Return

Engraving Code: 019C-3B33

DECKS	CONTACTS	PULL-TO	POS.		
			TRIP	WAT	MAC
1	11 ○— — —○18	✗			
2	22 ○— — —○23				✗
	26 ○— — —○27				✗
3	31 ○— — —○35	✗	✗	✗	

*Note: Decks 1 & 3 are
make-before-break*



CIRCUIT BREAKER CONTROL - 2452D


Handle: Pistol Grip

Spring Return

Engraving Code: 019C-3B33

DECKS	CONTACTS	POS.			
		PULL-TRIP	TRIP	MAC	CLOSE
1	12 ○— — —○ 13				✗
	16 ○— — —○ 17				✗
2	21 ○— — —○ 22			✗	
	25 ○— — —○ 26			✗	
3	31 ○— — —○ 38	✗	✗		
4	41 ○— — —○ 48	✗	✗		✗
5	52 ○— — —○ 53				✗
	56 ○— — —○ 57				✗

*Note: Decks 3 & 4 are
make-before-break*



CIRCUIT BREAKER CONTROL - 2457D


UNIVERSAL CIRCUIT

Handle: Pistol Grip

Spring Return

Engraving Code: 018B-2B23

DECKS	CONTACTS	POS.			
		TRIP	MAC	MAC	CLOSE
1	12 ○— — —○ 13				✗
	16 ○— — —○ 17				✗
2	21 ○— — —○ 28	✗			
	24 ○— — —○ 25	✗			
3	31 ○— — —○ 32		✗	✗	
	35 ○— — —○ 36		✗	✗	
4	42 ○— — —○ 43				✗
	46 ○— — —○ 47				✗
5	51 ○— — —○ 52	✗	✗		
	55 ○— — —○ 56	✗	✗		



CIRCUIT BREAKER CONTROL - 2458D

UNIVERSAL CIRCUIT

Handle: Pistol Grip

Spring Return

Engraving Code: 019C-3B33

DECKS	CONTACTS	POSITION			
		PULL-TRIP	TRIP	MAC	CLOSE
1	12 ○— — —○ 13				✗
	16 ○— — —○ 17				✗
2	21 ○— — —○ 28			✗	
	24 ○— — —○ 25			✗	
3	33 ○— — —○ 34	✗			
	37 ○— — —○ 38	✗			
4	41 ○— — —○ 42			✗	✗
	45 ○— — —○ 46			✗	✗
5	52 ○— — —○ 53				✗
	56 ○— — —○ 57				✗
6	61 ○— — —○ 62			✗	
	65 ○— — —○ 66			✗	

