ELECTROSWITCH
UNIT OF ELECTRO SWITCH CORP.
WEYMOUTH MASSACHUSETTS 02188
TEL:(781)335-5200 FAX:(781)335-4253

LATCHING SWITCH RELAY LOW LEVEL CONTROL WITH TAG NAMEPLATE

9230DE

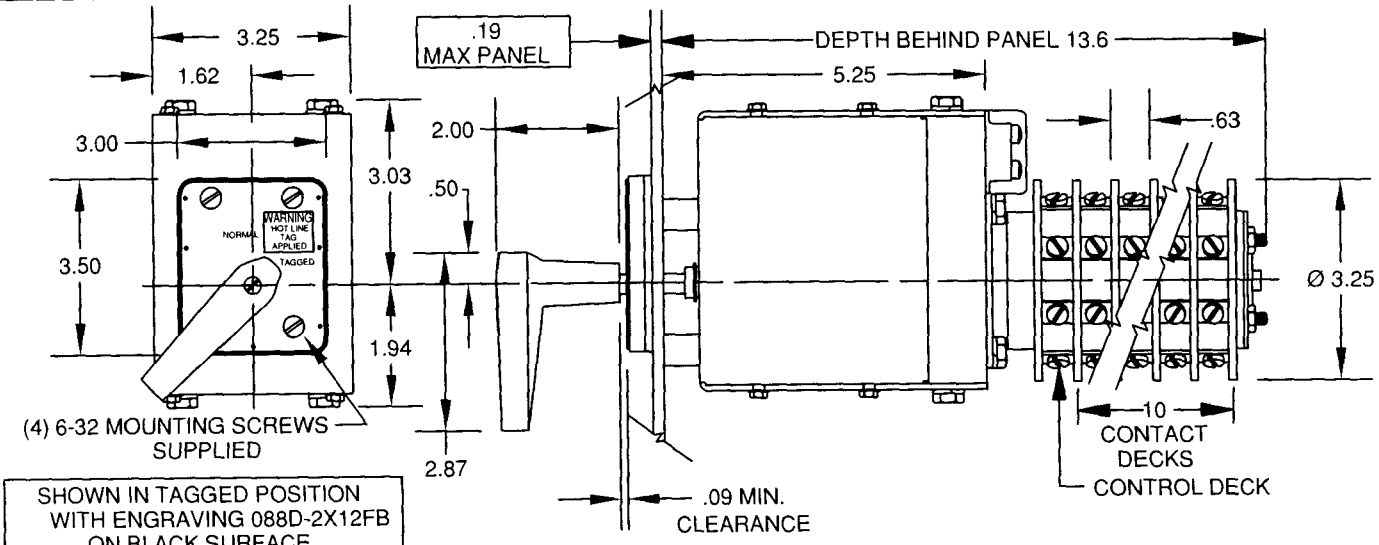

SHOWN IN TAGGED POSITION WITH ENGRAVING 088D-2X12FB ON BLACK SURFACE.

(3) #10-32 MOUNTING SCREWS SUPPLIED FOR MOUNTIG PLATE

8-32 X .25 BD.HD.TERMINAL SCREWS SUPPLIED UN-ASSEMBLED.

OPERATING VOLTAGE	PULL IN VOLTAGE:	CONTROL CIRCUIT BURDEN:	SOLENOID COIL RESISTANCE:	OPERATING TIME (RESPONSE):
125 VDC (COIL D)	90 VDC	6.6 AMPS 825 WATTS	18.96 OHMS	60 MSEC (MAX)

ORANGE CAUTION TAG APPEARS IN WINDOW IN TAGGED POSITION ONLY

WARNING HOT LINE TAG APPLIED

FOR FURTHER INFORMATION REFER TO TECHNICAL PUBLICATION LSR-1.

CONTROL DECK LAYOUT AND WIRING
24LSR SHOWN IN NORMAL POSITION.

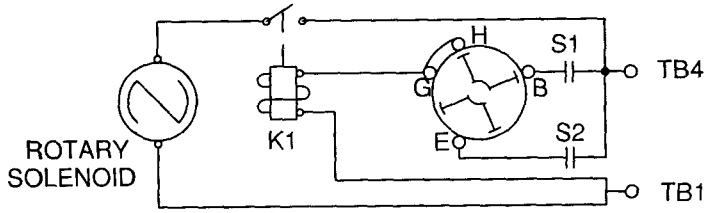

CONTACT	POSITION	
	NORMAL	TAGGED
B H	X	
E G		X

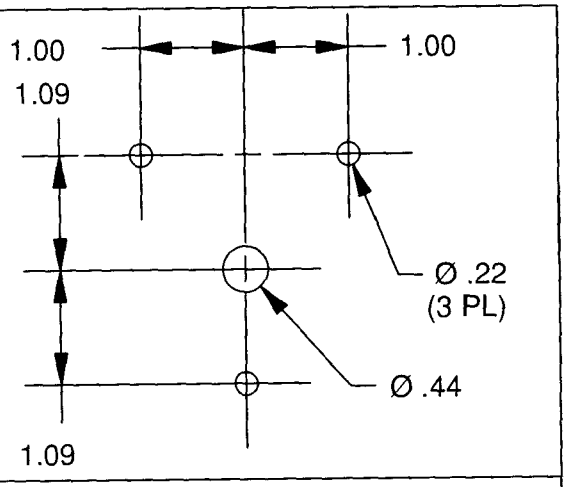

PANEL DRILLING DIMENSIONS

CUSTOMER DECKS.

SHOWN IN NORMAL POS.



CONTACTS		POSITION	
		NORMAL	TAGGED
DECK 1	11 13	X	
	12 14		X
	15 17	X	
	16 18		X

ADDITIONAL CUSTOMER DECKS SAME AS DECK 1 EXCEPT TERMINAL NUMBERS.
(DECK 2: 21 TO 28,DECK 3: 31 TO 38 ETC.)

REVISIONS:

MADE BY:	WCK	DATE:	12-20-07	DWG. NO:	REV
APPR BY:	WCK	DATE:	12-20-07	SHEET 1 OF 1	0